


7

LOW MU BASALT TILES

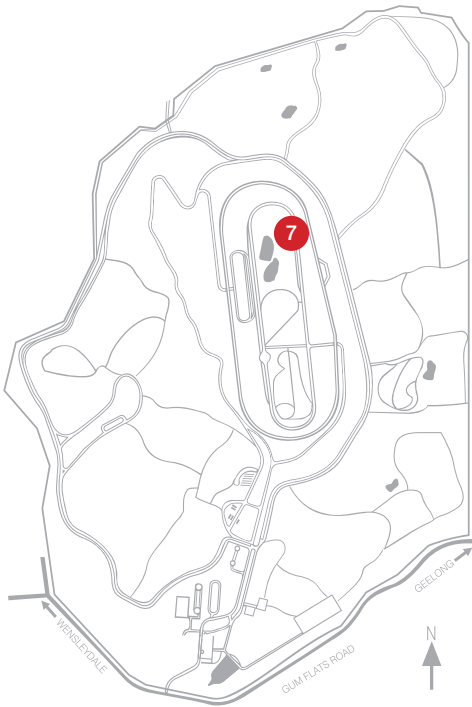

Overall length 120 metres long

- Tiles
- 1st section 70 metres long x 4 metres wide
 - 2nd section 50 metres long x 8 metres wide

Co-efficient of friction of surface 0.3 Mu

Hotmix surface adjacent to tiled area to allow split use testing, both wet and dry

Suitable for use by cars for development of ABS, traction control systems and electronic stability program systems

Test for low Mu requirements for the following Regulations:-

ADR31/01 & 31/02 Braking - for passenger vehicles

ADR35/02 & 35/03 Braking - for commercial vehicles

ECER13H, 13.09 & 13.10 - Braking

GB12676 & GB13594 - Braking for vehicles & trailers (China)

Approved by the UK's Vehicle Certification Authority (VCA) for ECE Regulation 13.10, Annex 13, Appendix 4 and ECE Regulation 13H, Annex 6, Appendix 4